


20V P-Channel Enhancement-Mode MOSFET 20V P 沟道增强型 MOS 管

VDS=-20V
RDS(ON), Vgs@-4.5V,Ids@-6.0A=13mΩ
RDS(ON), Vgs@-2.5V,Ids@-5.0A=17.5mΩ

Features 特性

Advanced trench process technology 高级的加工技术
High Density Cell Design For Ultra Low On-Resistance 极低的导通电阻高密度的单元设计

Package Dimensions 封装尺寸及外形图

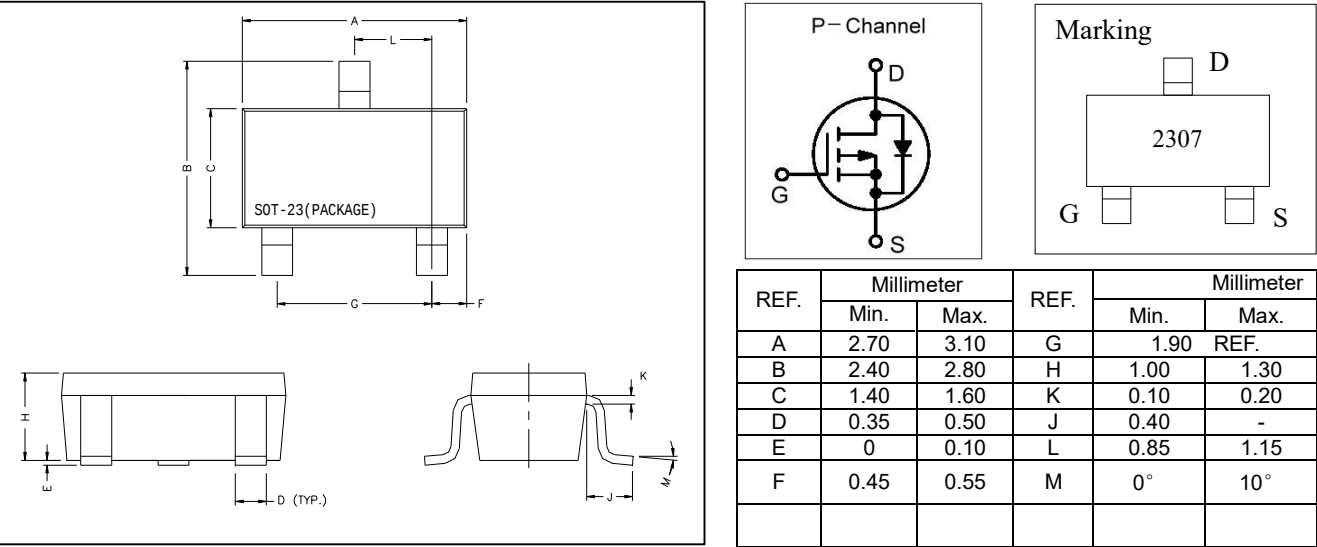

Maximum Ratings and Thermal Characteristics (TA = 25 °C unless otherwise noted) 25 °C 极限参数和热特性



Parameter 极限参数		Symbol 符号	Limit 范围	Unit 单位
Drain-Source Voltage 漏源电压		V _{DS}	-20	V
Gate-Source Voltage 栅源电压		V _{GS}	± 12	
Continuous Drain Current 连续漏极电流		I _D	-6.0	A
Pulsed Drain Current 脉冲漏极电流		I _{DM}	-20	
Maximum Power Dissipation 最大耗散功率	TA = 25°C	P _D	1.1	W
	TA = 75°C		0.7	
Operating Junction and Storage Temperature Range 使用及储存温度		T _J , T _{stg}	-55 to 150	°C
Junction-to-Ambient Thermal Resistance (PCB mounted) 结环热阻		R _{θJA}	110	°C/W

ELECTRICAL CHARACTERISTICS 一般电气特性

Parameter 参数	符号	Test Condition 测试条件	最小值	典型值	最大值	单位
Static 静态参数						
Drain-Source Breakdown Voltage 漏源击穿电压	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	-20			V
Drain-Source On-State Resistance 漏源导通电阻	$R_{DS(on)}$	$V_{GS} = -4.5V, I_D = -6.0A$		13.0	15.0	mΩ
Drain-Source On-State Resistance 漏源导通电阻	$R_{DS(on)}$	$V_{GS} = -2.5V, I_D = -5.0A$		17.5	20.0	
Gate Threshold Voltage 开启电压	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-0.5	-0.75	-1.0	V
Zero Gate Voltage Drain Current 零栅压漏极电流	I_{DSS}	$V_{DS} = -20V, V_{GS} = 0V$			-1	uA
Gate Body Leakage 漏极短路时截止栅电流	I_{GSS}	$V_{GS} = \pm 12V, V_{DS} = 0V$			±100	nA
Forward Transconductance 正向跨导	g_{fs}	$V_{DS} = -10V, I_D = -6.0A$		8.0		S
Dynamic 动态参数						
Total Gate Charge 栅极总电荷	Q_g	$V_{DS} = -10V, I_D = -6.0A$ $V_{GS} = -4.5V$		16		nC
Gate-Source Charge 栅-源极电荷	Q_{gs}			1.5		
Gate-Drain Charge 栅-漏极电荷	Q_{gd}			3.6		
Turn-On Delay Time 导通延迟时间	$t_{d(on)}$	$V_{DD} = -10V, R_L = 10\Omega$ $I_D = -1A, V_{GEN} = -4.5V$ $R_G = 6\Omega$		18		ns
Turn-On Rise Time 导通上升时间	t_r			13		
Turn-Off Delay Time 关断延迟时间	$t_{d(off)}$			118		
Turn-Off Fall Time 关断下降时间	t_f			54		
Input Capacitance 输入电容	C_{iss}	$V_{DS} = -10V, V_{GS} = 0V$ $f = 1.0 MHz$		1555		pF
Output Capacitance 输出电容	C_{oss}			182		
Reverse Transfer Capacitance 反向传输电容	C_{rss}			147		
Source-Drain Diode 源漏二极管参数						
Max. Diode Forward Current 最大正向电流	I_S				-1.7	A
Diode Forward Voltage 正向电压	V_{SD}	$I_S = -1.7A, V_{GS} = 0V$			-1.2	V


Note: Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$ 注意: 脉冲测试: 脉冲宽度 $\leq 300\mu s$ 死区 $\leq 2\%$

Switching Time Test Circuit and Waveforms

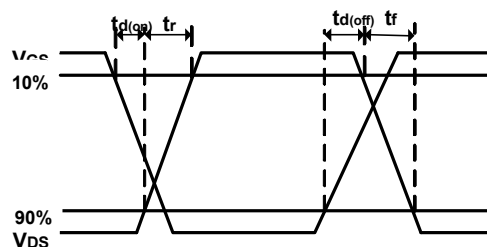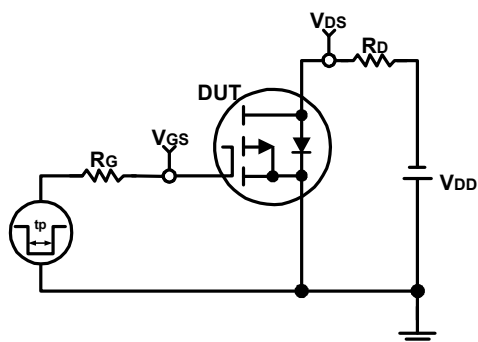


Typical Operating Characteristics (Cont.) 电气性能特征曲线


Output Characteristics

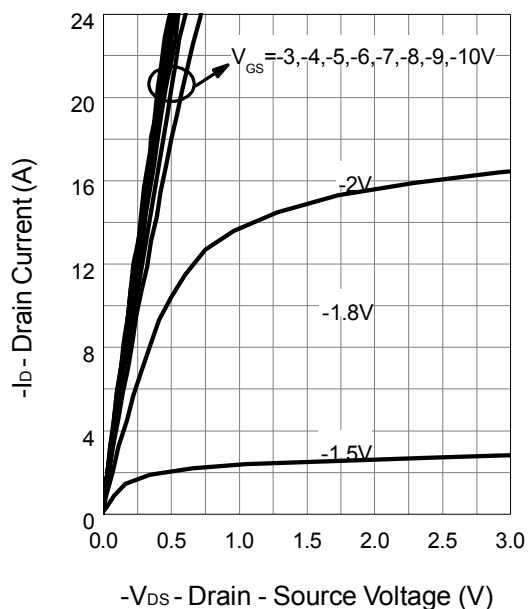

Drain-Source On Resistance

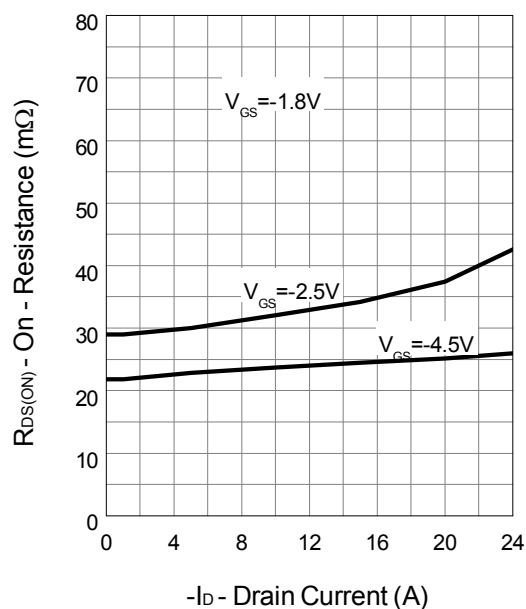

Gate-Source On Resistance

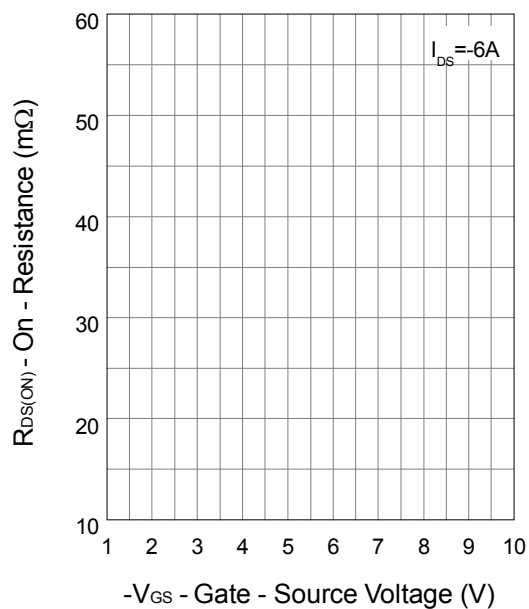

Gate Threshold Voltage

